

# CYLINDER 0.8 L



**ultra light**  
COMPOSITE CYLINDERS



**Reinforcing fibers:** carbon fiber / DuPont™ Kevlar® fiber  
**Liner:** PET  
**Working pressure:** 300 bar  
**Test pressure:** 450 bar  
**Produced by:** PN-EN 12245-2009  
**Directive:** PI 2010/35/EU  
**Certificate:** TÜV SÜD  
**Gases:** Air, O<sub>2</sub>, N<sub>2</sub>, CO<sub>2</sub>,




CAPACITY	WEIGHT	(D) DIAMETER	(L) LENGTH	LIFE SPAN				WARRANTY
				15 yrs	20 yrs	30 yrs	NLL	
0.8 L	0,59 kg	103 mm	195 mm	x				24 months

## DESCRIPTION:

The cylinder is manufactured by filament winding. Layer of carbon fiber and Kevlar® aramid filament fiber in an epoxy warp on the PET liner, allows storage of gases under high pressure. The cylinder features high barrier properties to guarantee safe gas storage. The gases stored in the cylinder are kept clean and user safe.

## APPLICATION:

paintball  
others

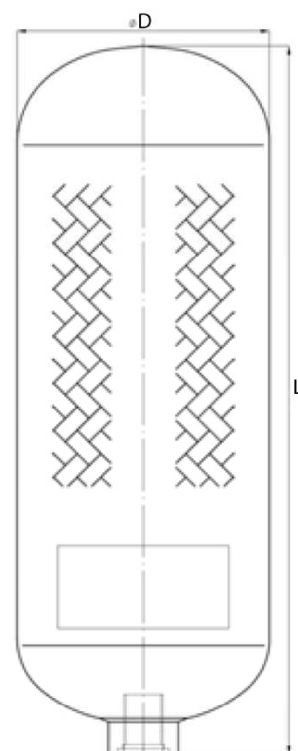

**Screw thread:**  
5/8" 18 UNF  
M18 x 1,5  
17 E

\* DuPont™ and Kevlar® are trademarks or registered trademarks of E. I. du Pont de Nemours and Company used under license to Techplast Sp. z o.o.



Techplast Sp.z.o.o  
Wieprz 267  
34-122 Wieprz  
Poland

Production Plant  
ul. Krakowska 83P  
34-120 Andrychów  
Poland

tel. +48 33 875 29 88  
fax. +48 33 875 29 88  
[www.safercylinders.net](http://www.safercylinders.net)

