

CYLINDER 6.8 L (03H)



ultra light
COMPOSITE CYLINDERS



Reinforcing fibers:	Glass fiber
Liner:	PET
Working pressure:	220 bar
Test pressure:	330 bar
Produced by:	EN 12245-2009
Directive:	PI 2010/35/EU
Certificate:	TÜV SÜD
Gases:	CO ₂ , Ar, N ₂ , Air



CAPACITY	WEIGHT	(D) DIAMETER	(L) LENGTH	LIFE SPAN				WARRANTY
				15 yrs	20 yrs	30 yrs	NLL	
6.8L	~3.9 kg	138 mm	670 mm	X	X	X	X	24 months


DESCRIPTION:

The cylinder is manufactured by filament winding. Layer of glass fiber in an epoxy warp on the PET liner, allows storage of gases under high pressure. The cylinder features high barrier properties to guarantee safe gas storage. PET liner protects the cylinder against reaction with gas thus preventing corrosion.

The gases stored in the cylinder are kept clean and user safe

APPLICATION:

Industry
other

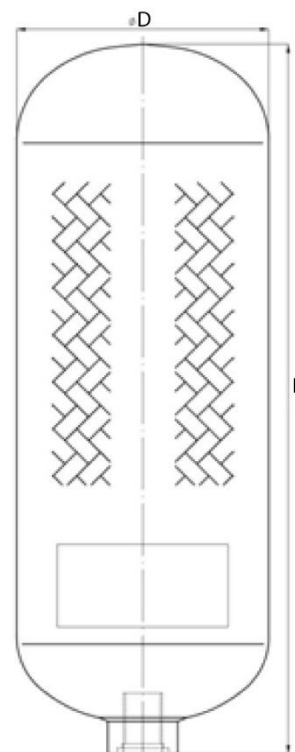

Screw thread:
25 E

* DuPont™ and Kevlar® are trademarks or registered trademarks of E. I. du Pont de Nemours and Company used under license to Techplast Sp. z o.o.



Techplast Sp.z.o.o
Wieprz 267
34-122 Wieprz
Poland

Production Plant
ul. Krakowska 83P
34-120 Andrychów
Poland

tel. +48 33 875 29 88
fax. +48 33 875 29 88
www.safercylinders.net

